


# DRIVE-ON HIGH POINT FILTERS


1,000/2,000/4,000 LBS

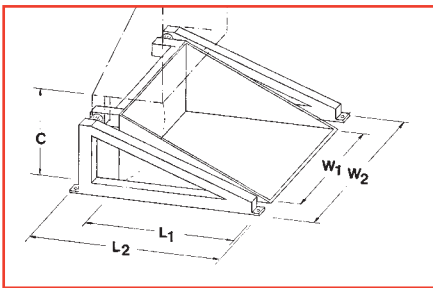


DRIVE-ONS

## OPTIONS

Guides to help position load into unit

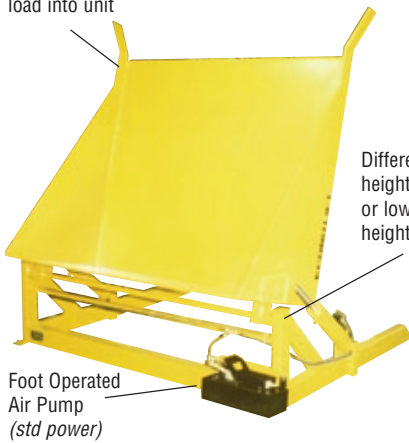

Different pivot heights for higher or lower working heights available

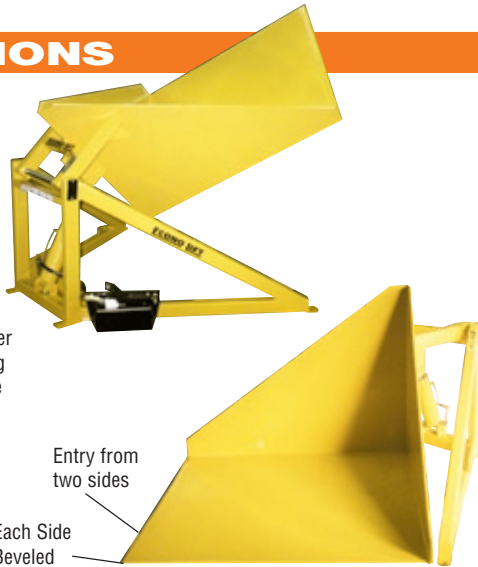

Entry from two sides

Each Side Beveled

GAYLORD CORNER TILTER

## TILT ANGLE

- 0-90 degrees

## SAFETY

- Velocity fuse on each cylinder to eliminate collapsing due to hose failure
- Maximum reach in tilted position to end of back plate - 30"

## POWER SUPPLIES

Air/Hydraulic (standard)

Foot Pedal Standard (hand control optional)

A/C 110/1/60 volt (standard)

Hand or foot control

A/C 460/575/3/60 volt (optional)

Hand or foot control

## OPTIONS

- Photo Eyes
- Safety Skirts
- Increase/restrict tilt angle
- Full plated platform
- Increase/reduce platform size
- Semi-portable c/w dolly handle

SPECIFICATIONS		DO-HPT10	DO-HPT20	DO-HPT40
Capacity	lbs.	1,000	2,000	4,000
Platform Size	in.	50" x 48"	50" x 48"	50" x 48"
W <sub>1</sub> x L <sub>1</sub>		60" x 50"	60" x 50"	60" x 50"
Platform Thickness - TP		3/8"	3/8"	1/2"
Tilt Angle		0-90°	0-90°	0-90°
Height from Floor at 90° - C		32"	32"	32"
Height of Back Plate		30"	30"	30"
Total Dimensions		57" x 59.5"	57" x 59.5"	57" x 59.5"
W <sub>2</sub> x L <sub>2</sub>		67" x 61.5"	67" x 61.5"	67" x 61.5"