
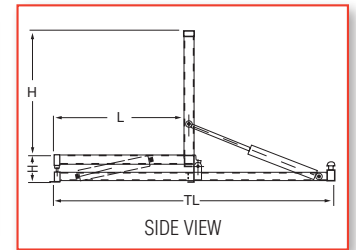


STATIONARY UPENDERS

1,000/2,000/4,000/6,000 LBS



CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

LOW HEIGHT

- 10"

TILT ANGLE

- 0-90 degrees

SAFETY

- Velocity fuses on each cylinder to eliminate the table from collapsing
- Hold down tabs on all four corners

CYLINDERS

- Double acting


POWER

- A/C 110 volt, single phase (standard) amp draw 15(+) amps
- Hand or foot control

OPTIONAL

- A/C 220/460/575, three phase available
- Hand or foot control (standard)
- Larger/smaller platforms
- "V" backplates for rolls/coils
- Conveyors
- Safety skirting

OPTIONS

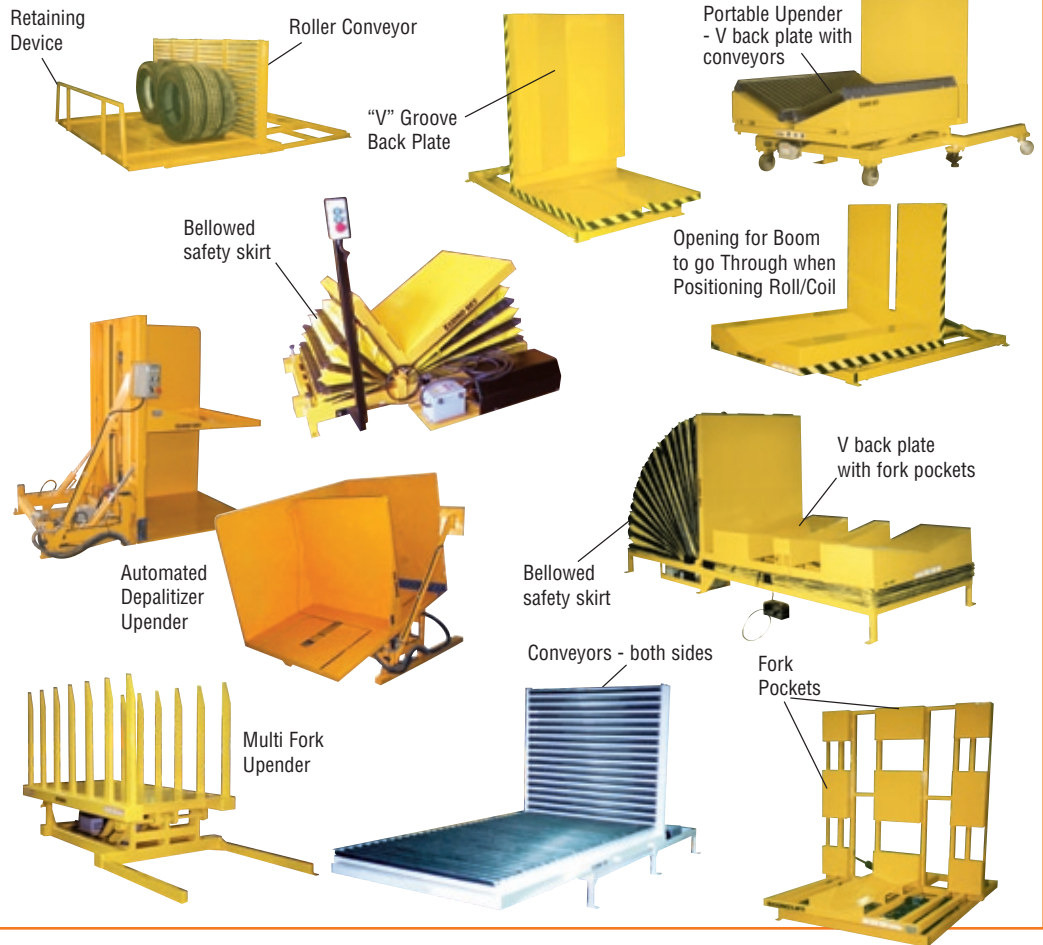

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE width x length x height (IN.)	LOW'D HEIGHT TP (IN.)	TOTAL LENGTH (IN.)	TILT ANGLE
SU36-10	1,000	36 x 36 x 36	10	76	0 - 90°
SU36-20	2,000	36 x 36 x 36	10	76	0 - 90°
SU36-40	4,000	36 x 36 x 36	10	76	0 - 90°
SU36-60	6,000	36 x 36 x 36	10	76	0 - 90°
SU52-10	1,000	52 x 52 x 52	10	108	0 - 90°
SU52-20	2,000	52 x 52 x 52	10	108	0 - 90°
SU52-40	4,000	52 x 52 x 52	10	108	0 - 90°
SU52-60	6,000	52 x 52 x 52	10	108	0 - 90°